


HIGH-PERFORMANCE RESINS FOR SPORT COURT AND FIELD MARKING


Adhesion **Bleed-Through Resistance**
Flexibility **Hardness** **Strength**
Abrasion Resistance **Chemical Resistance** **Exterior**
Blush Resistance **Dirt Pickup Resistance**
 Early Water Resistance
 Early Blister Resistance

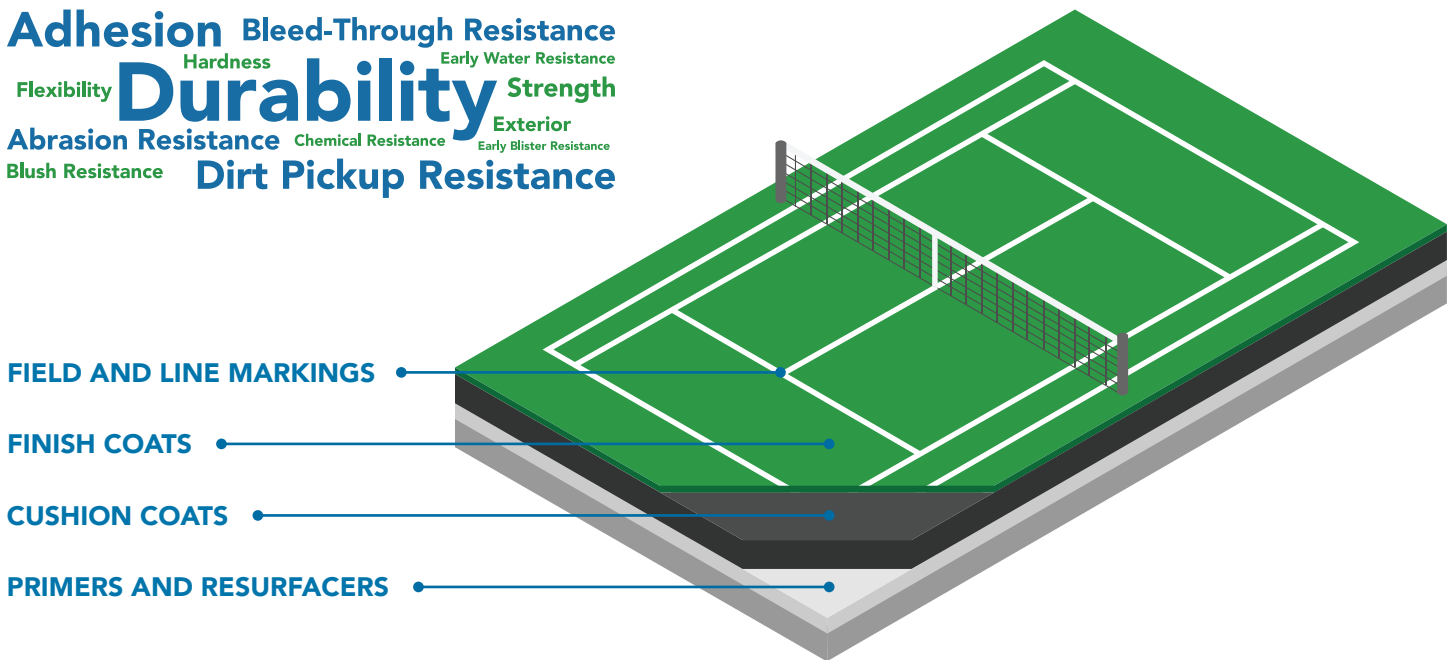

			EPS® 2545 Early water resistance, alkali strippable Temporary markings		
EPS® 2719 Asphalt bleed-through resistance, adhesion		EPS® 2708 High alkaline applications, abrasion resistance, adhesion, durability, flexibility Permanent markings		EPS® 2103 Strength and flexibility	EPS® 2293 Blush and chemical resistance
EPS® 2708 Exterior durability, flexibility	EPS® 2763 Flexibility and adhesion to rubber fillers	RayCryl® 1244 Abrasion and early blister resistance Permanent markings		EPS® 2224 Adhesion, flexibility	RayCryl® 1008 Hardness, dirt pickup resistance, water and blush resistance
Primers and Resurfacers	Cushion Coat	Finish Coats	Field and Line Markings	Crack Fillers and Patching Compounds	Concrete Topcoats

HIGH-PERFORMANCE RESINS FOR SPORT COURT AND FIELD MARKING

Product	Chemistry	Solids (%)	pH	MFFT (°C)
EPS [®] 2103	All-Acrylic	46.5	8.5-9.5	7
EPS [®] 2224	All-Acrylic	58.0	3.5-5.5	-11 (Tg)
EPS [®] 2293	All-Acrylic	40.0	8.0-9.0	<10
EPS [®] 2545	Styrenated Acrylic	30.0	9.0-10.0	1
EPS [®] 2708	All-Acrylic	50.0	8.0-9.0	20
EPS [®] 2719	All-Acrylic	55.0	8.0-8.5	4 (Tg)
EPS [®] 2763	All-Acrylic	58.0	8.0	0
RayCryl [®] 1008	All-Acrylic	45.0	8.5-9.5	16
RayCryl [®] 1244	All-Acrylic	50.0	8.5-9.5	0

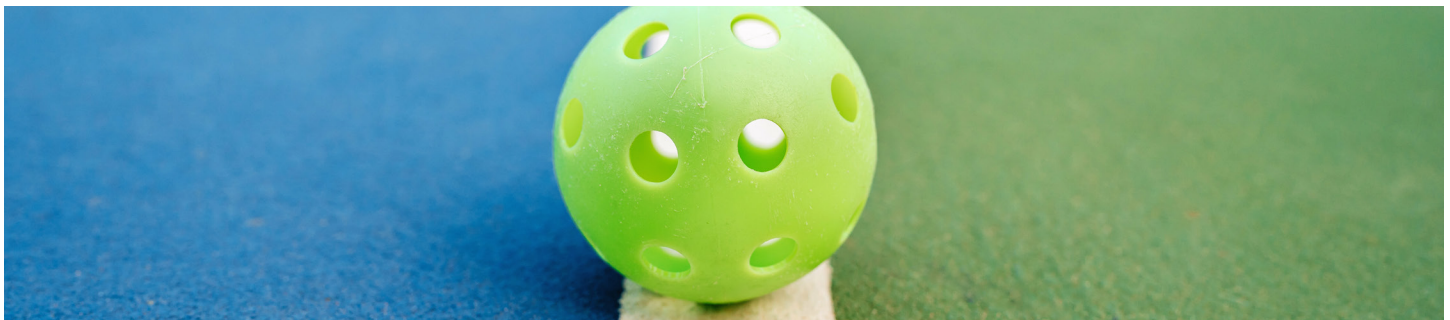

THE EXPERTISE BEHIND THE INNOVATION

The data on this sheet represents typical values. Since application variables are a major factor in product performance, this information should serve only as a general guide. EPS assumes no obligation or liability for use of this information. UNLESS EPS AGREES OTHERWISE IN WRITING, EPS MAKES NO WARRANTIES, EXPRESS OR IMPLIED, AND DISCLAIMS ALL IMPLIED WARRANTIES INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR

PURPOSE OR FREEDOM FROM PATENT INFRINGEMENT. EPS WILL NOT BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES. Your only remedy for any defect in this product is the replacement of the defective product, or a refund of its purchase price, at our option. Unless otherwise agreed in writing, all sales of EPS products are governed by the EPS Terms and Conditions of Sale, available at <https://www.epscca.com/export/sites/epscca/galleries/pdfs/salesterms.pdf>

CONTACT INFORMATION

EPS Headquarters
1400 N. State St.
Marengo, Illinois 60152

Sales and Customer Service
Phone: 800-654-4242
Email: info@epscca.com

EPS Technical Service
Phone: 800-654-4242
Email: info@eps-materials.com

epscca.com